

Compressed air for all your needs!

## RS-B 2.2 – 11.0

 Made in Germany



Motor power: 2.2 to 11.0 kW



RS-B 2.2 – 11.0 kW



RSK-B 2.2 – 11.0 kW




RSD-B 2.2 – 11.0 kW



RSDK-B 2.2 – 11.0 kW

## RS-B Screw Compressors – the compact, high-performance and robust series from RENNER.

In the development of the new compact series the key features focused on were high-performance compressed air supply requiring little space and providing easy access to parts to be serviced.

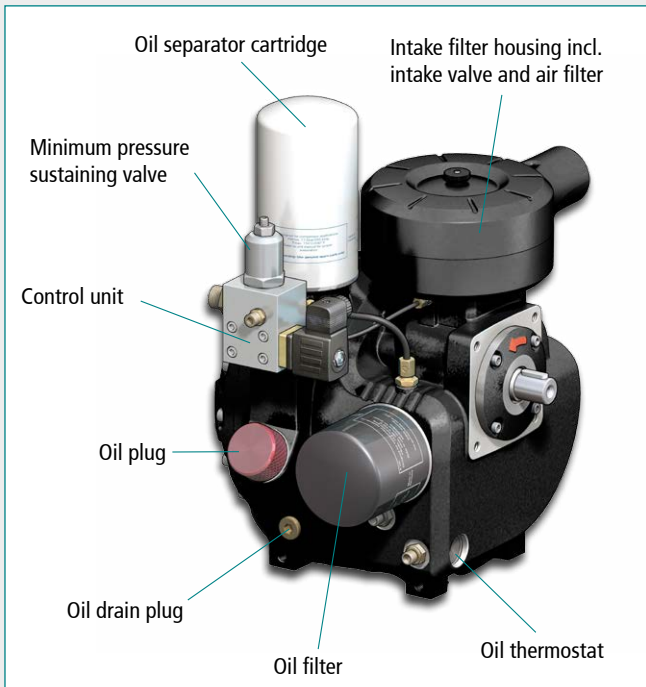

### Design features and advantages of the RS-B series:


- 2-year full functional warranty
- Maintenance-friendly due to easily removable doors
- The right solution for all requirements: as a freestanding system, with attached refrigeration dryer and as a complete unit on air receiver in various sizes
- Intensive cooling combined with an effective oil-air cooler guarantees operational safety and excellent air quality
- Developed for industrial use – including continuous operation
- Standard components by German brand manufacturers provide a high standard of quality and flexibility in the event of faults
- High-performance compact air end with integrated oil thermo valve
- Compact design, therefore lower space requirement
- Control via RENNERlogic
- Optional extras: RENNERtronic/RENNERtronic Plus electronic control



Encapsulated air end: no separate oil separator vessel and easy access for maintenance.



No lines and connecting elements are required due to the integrated oil thermo valve.

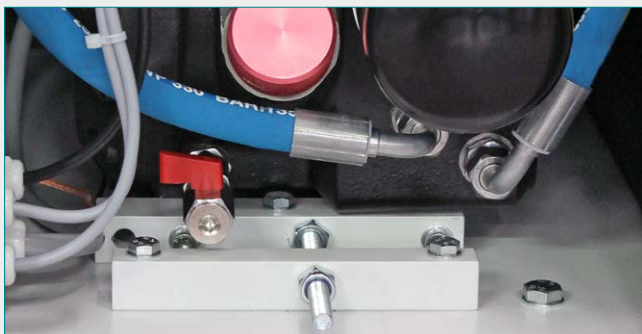

Easy belt tensioning: by adjusting the air end via an adjusting screw, the belt is tensioned and secured.



The RS-B is optionally available with an auxiliary pre-filter frame with filter mat to protect against dirt and RENNERtronic or RENNERtronic Plus.



## RENNER Screw Compressors

RS-B 2.2 – 11.0

### RS-B 2.2 – 11.0

| Model     | Free air delivery<br>m <sup>3</sup> /min / cfm |        |         |        | Motor power |      | Compressed air outlet<br>inch | Noise level<br>dB(A) <sup>(1)</sup> | Dimensions<br>L x W x H<br>mm | Weight<br>kg |
|-----------|--|--------|---------|--------|-------------|------|-------------------------------|-------------------------------------|-------------------------------|--------------|
|           | 7.5 bar  | 10 bar | 7.5 bar | 10 bar | kW          | HP   |                               |                                     |                               |              |
| RS-B 2.2  | 0.34   | 12     | 0.27    | 10     | 2.2         | 3.0  | G½                            | 66                                  | 716 x 536 x 495               | 124          |
| RS-B 3.0  | 0.46   | 16     | 0.38    | 13     | 3.0         | 4.0  | G½                            | 70                                  | 716 x 536 x 495               | 133          |
| RS-B 4.0  | 0.64   | 23     | 0.53    | 19     | 4.0         | 5.5  | G½                            | 70                                  | 716 x 536 x 495               | 133          |
| RS-B 5.5  | 0.83   | 30     | 0.74    | 26     | 5.5         | 7.5  | G½                            | 75                                  | 716 x 536 x 495               | 159          |
| RS-B 7.5  | 1.13   | 40     | 1.02    | 36     | 7.5         | 10.0 | G½                            | 78                                  | 776 x 556 x 597               | 189          |
| RS-B 11.0 | 1.57   | 55     | 1.54    | 54     | 11.0        | 15.0 | G½                            | 81                                  | 776 x 556 x 597               | 207          |

<sup>(1)</sup> according to DIN EN ISO 2151:2009



## RENNER Screw Compressors

RSK-B 2.2 – 11.0 with attached refrigeration dryer

### RSK-B 2.2 – 11.0

| Model      | Free air delivery<br>m <sup>3</sup> /min / cfm |        |         |        | Motor power |      | Compressed air outlet<br>inch | Noise level<br>dB(A) <sup>(1)</sup> | Dimensions<br>L x W x H<br>mm | Weight<br>kg |
|------------|--|--------|---------|--------|-------------|------|-------------------------------|-------------------------------------|-------------------------------|--------------|
|            | 7.5 bar  | 10 bar | 7.5 bar | 10 bar | kW          | HP   |                               |                                     |                               |              |
| RSK-B 2.2  | 0.34   | 12     | 0.27    | 10     | 2.2         | 3.0  | G½                            | 66                                  | 971 x 536 x 705               | 160          |
| RSK-B 3.0  | 0.46   | 16     | 0.38    | 13     | 3.0         | 4.0  | G½                            | 70                                  | 971 x 536 x 705               | 169          |
| RSK-B 4.0  | 0.64   | 23     | 0.53    | 19     | 4.0         | 5.5  | G½                            | 70                                  | 971 x 536 x 705               | 169          |
| RSK-B 5.5  | 0.83   | 30     | 0.74    | 26     | 5.5         | 7.5  | G½                            | 75                                  | 971 x 536 x 705               | 195          |
| RSK-B 7.5  | 1.13   | 40     | 1.02    | 36     | 7.5         | 10.0 | G½                            | 78                                  | 1031 x 556 x 721              | 225          |
| RSK-B 11.0 | 1.57   | 55     | 1.54    | 54     | 11.0        | 15.0 | G½                            | 81                                  | 1031 x 556 x 721              | 243          |

<sup>(1)</sup> according to DIN EN ISO 2151:2009

#### Options for RS-B and RSK-B:

|  | Part no. |
|--|----------|
| Star-delta-starter for all 3.0 kW and 4.0 kW compressors (from 5.5 kW inclusive) | 10866    |
| Rotation direction control via phase rotation control                            | 10867    |
| Electronic control RENNERtronic  | 10869    |
| Electronic control RENNERtronic Plus   | 00829    |
| Level actuated drain for refrigeration dryer (only for RSK)                      | 05311    |
| Auxiliary pre-filter frame with filter mat for 2.2 – 5.5 kW                      | 16269    |
| Auxiliary pre-filter frame with filter mat for 7.5 – 11.0 kW                     | 16270    |
| Rack for RS-B 2.2 – 11.0 and for RSK-B 2.2 – 11.0                                | 16529    |



## RENNER Screw Compressors

RSD-B 2.2 – 11.0 on air receiver according to AD2000 directives (from 250 ltr with hand-hole)

### RSD-B 2.2 – 11.0

| Model      | Free air delivery<br>m <sup>3</sup> /min / cfm |    |        |    | Motor power |      | Compressed air outlet<br>inch | Noise level<br>dB(A) <sup>(1)</sup> | Air receiver<br>liter | Dimensions<br>L x W x H<br>mm | Weight<br>kg |
|------------|--|----|--------|----|-------------|------|-------------------------------|-------------------------------------|-----------------------|-------------------------------|--------------|
|            | 7.5 bar  |    | 10 bar |    | kW          | HP   |                               |                                     |                       |                               |              |
| RSD-B 2.2  | 0.34   | 12 | 0.27   | 10 | 2.2         | 3.0  | G½                            | 66                                  | 90                    | 985 x 536 x 995               | 175          |
| RSD-B 3.0  | 0.46   | 16 | 0.38   | 13 | 3.0         | 4.0  | G½                            | 70                                  | 90                    | 985 x 536 x 995               | 184          |
| RSD-B 4.0  | 0.64   | 23 | 0.53   | 19 | 4.0         | 5.5  | G½                            | 70                                  | 90                    | 985 x 536 x 995               | 184          |
| RSD-B 5.5  | 0.83   | 30 | 0.74   | 26 | 5.5         | 7.5  | G½                            | 75                                  | 90                    | 985 x 536 x 995               | 210          |
| RSD-B 2.2  | 0.34   | 12 | 0.27   | 10 | 2.2         | 3.0  | G½                            | 66                                  | 2x90                  | 980 x 765 x 1076              | 220          |
| RSD-B 3.0  | 0.46   | 16 | 0.38   | 13 | 3.0         | 4.0  | G½                            | 70                                  | 2x90                  | 980 x 765 x 1076              | 229          |
| RSD-B 4.0  | 0.64   | 23 | 0.53   | 19 | 4.0         | 5.5  | G½                            | 70                                  | 2x90                  | 980 x 765 x 1076              | 229          |
| RSD-B 5.5  | 0.83   | 30 | 0.74   | 26 | 5.5         | 7.5  | G½                            | 75                                  | 2x90                  | 980 x 765 x 1076              | 255          |
| RSD-B 7.5  | 1.13   | 40 | 1.02   | 36 | 7.5         | 10.0 | G½                            | 78                                  | 2x90                  | 980 x 765 x 1148              | 285          |
| RSD-B 2.2  | 0.34   | 12 | 0.27   | 10 | 2.2         | 3.0  | G½                            | 66                                  | 250                   | 1410 x 570 x 1090             | 210          |
| RSD-B 3.0  | 0.46   | 16 | 0.38   | 13 | 3.0         | 4.0  | G½                            | 70                                  | 250                   | 1410 x 570 x 1090             | 219          |
| RSD-B 4.0  | 0.64   | 23 | 0.53   | 19 | 4.0         | 5.5  | G½                            | 70                                  | 250                   | 1410 x 570 x 1090             | 219          |
| RSD-B 5.5  | 0.83   | 30 | 0.74   | 26 | 5.5         | 7.5  | G½                            | 75                                  | 250                   | 1410 x 570 x 1090             | 245          |
| RSD-B 7.5  | 1.13   | 40 | 1.02   | 36 | 7.5         | 10.0 | G½                            | 78                                  | 250                   | 1410 x 570 x 1162             | 275          |
| RSD-B 11.0 | 1.57   | 55 | 1.54   | 54 | 11.0        | 15.0 | G½                            | 81                                  | 250                   | 1410 x 570 x 1162             | 293          |

<sup>(1)</sup> according to DIN EN ISO 2151:2009

| Options:  | Part no. |
|---|----------|
| Star-delta-starter for all 3.0 kW and 4.0 kW compressors (from 5.5 kW inclusive)                        | 10866    |
| Rotation direction control via phase rotation control   | 10867    |
| 500 ltr air receiver (supplement on price of 250 ltr air receiver version)                              | 10871    |
| Galvanized 90 ltr air receiver (only up to 10 bar)  | 02838    |
| Galvanized 250 ltr air receiver (supplement on price of powder-coated 250 ltr air receiver version)     | 10868    |
| Galvanized 500 ltr air receiver (supplement on price of powder-coated 500 ltr air receiver version)     | 10870    |
| Electronic control RENNERtronic   | 10869    |
| Electronic control RENNERtronic Plus  | 00829    |
| Kit for air receiver with level-controlled condensate drain   | 03162    |
| Kit for 2x90 ltr air receiver with level-controlled condensate drain                                    | 13274    |
| Metal bumper set for 90 ltr air receiver (consisting of 4 pieces. each Ø 75 mm / height 15 mm)          | 15220    |
| Metal bumper set for 250/270/500 ltr air receiver (consisting of 4 pieces. each Ø 75 mm / height 40 mm) | 15221    |
| Auxiliary pre-filter frame with filter mat for 2.2 – 5.5 kW   | 16269    |
| Auxiliary pre-filter frame with filter mat for 7.5 – 11.0 kW  | 16270    |



## RENNER Screw Compressors

RSDK-B 2.2 – 11.0 on air receiver according to AD2000 directives (from 250 ltr with handhole) with attached refrigeration dryer

### RSDK-B 2.2 – 11.0

| Model       | Free air delivery<br>m <sup>3</sup> /min / cfm |        |        |        | Motor power |      | Compressed air outlet<br>inch | Noise level<br>dB(A) <sup>(1)</sup> | Air receiver<br>liter | Dimensions<br>L x W x H<br>mm | Weight<br>kg |
|-------------|--|--------|--------|--------|-------------|------|-------------------------------|-------------------------------------|-----------------------|-------------------------------|--------------|
|             | 7.5 bar  | 10 bar | 10 bar | 10 bar | kW          | HP   |                               |                                     |                       |                               |              |
| RSDK-B 2.2  | 0.34   | 12     | 0.27   | 10     | 2.2         | 3.0  | G½                            | 66                                  | 90                    | 1044 x 536 x 1175             | 211          |
| RSDK-B 3.0  | 0.46   | 16     | 0.38   | 13     | 3.0         | 4.0  | G½                            | 70                                  | 90                    | 1044 x 536 x 1175             | 220          |
| RSDK-B 4.0  | 0.64   | 23     | 0.53   | 19     | 4.0         | 5.5  | G½                            | 70                                  | 90                    | 1044 x 536 x 1175             | 220          |
| RSDK-B 5.5  | 0.83   | 30     | 0.74   | 26     | 5.5         | 7.5  | G½                            | 75                                  | 90                    | 1044 x 536 x 1175             | 246          |
| RSDK-B 2.2  | 0.34   | 12     | 0.27   | 10     | 2.2         | 3.0  | G½                            | 66                                  | 2x90                  | 980 x 765 x 1257              | 256          |
| RSDK-B 3.0  | 0.46   | 16     | 0.38   | 13     | 3.0         | 4.0  | G½                            | 70                                  | 2x90                  | 980 x 765 x 1257              | 265          |
| RSDK-B 4.0  | 0.64   | 23     | 0.53   | 19     | 4.0         | 5.5  | G½                            | 70                                  | 2x90                  | 980 x 765 x 1257              | 265          |
| RSDK-B 5.5  | 0.83   | 30     | 0.74   | 26     | 5.5         | 7.5  | G½                            | 75                                  | 2x90                  | 980 x 765 x 1257              | 291          |
| RSDK-B 7.5  | 1.13   | 40     | 1.02   | 36     | 7.5         | 10.0 | G½                            | 78                                  | 2x90                  | 1031 x 765 x 1273             | 321          |
| RSDK-B 2.2  | 0.34   | 12     | 0.27   | 10     | 2.2         | 3.0  | G½                            | 66                                  | 250                   | 1410 x 570 x 1270             | 246          |
| RSDK-B 3.0  | 0.46   | 16     | 0.38   | 13     | 3.0         | 4.0  | G½                            | 70                                  | 250                   | 1410 x 570 x 1270             | 255          |
| RSDK-B 4.0  | 0.64   | 23     | 0.53   | 19     | 4.0         | 5.5  | G½                            | 70                                  | 250                   | 1410 x 570 x 1270             | 255          |
| RSDK-B 5.5  | 0.83   | 30     | 0.74   | 26     | 5.5         | 7.5  | G½                            | 75                                  | 250                   | 1410 x 570 x 1270             | 281          |
| RSDK-B 7.5  | 1.13   | 40     | 1.02   | 36     | 7.5         | 10.0 | G½                            | 78                                  | 250                   | 1410 x 570 x 1286             | 311          |
| RSDK-B 11.0 | 1.57   | 55     | 1.54   | 54     | 11.0        | 15.0 | G½                            | 81                                  | 250                   | 1410 x 570 x 1286             | 329          |

<sup>(1)</sup> according to DIN EN ISO 2151:2009

| Options:  | Part no. |
|---|----------|
| Star-delta-starter for all 3.0 kW and 4.0 kW compressors (from 5.5 kW inclusive)                        | 10866    |
| Rotation direction control via phase rotation control   | 10867    |
| 500 ltr air receiver (supplement on price of 250 ltr air receiver version)                              | 10871    |
| Galvanized 90 ltr air receiver (only up to 10 bar)  | 02838    |
| Galvanized 250 ltr air receiver (supplement on price of powder-coated 250 ltr air receiver version)     | 10868    |
| Galvanized 500 ltr air receiver (supplement on price of powder-coated 500 ltr air receiver version)     | 10870    |
| Electronic control RENNERtronic   | 10869    |
| Electronic control RENNERtronic Plus  | 00829    |
| Level actuated drain for refrigeration dryer  | 05311    |
| Kit for air receiver with level-controlled condensate drain   | 03162    |
| Kit for 2x90 ltr air receiver with level-controlled condensate drain                                    | 13274    |
| Metal bumper set for 90 ltr air receiver (consisting of 4 pieces, each Ø 75 mm / height 15 mm)          | 15220    |
| Metal bumper set for 250/270/500 ltr air receiver (consisting of 4 pieces, each Ø 75 mm / height 40 mm) | 15221    |
| Auxiliary pre-filter frame with filter mat for 2.2 – 5.5 kW   | 16269    |
| Auxiliary pre-filter frame with filter mat for 7.5 – 11.0 kW  | 16270    |



## RENNER Screw Compressors

RSD-B ECN 2.2 – 11.0 on ECN air receiver

RSDK-B ECN 2.2 – 11.0 on ECN air receiver with attached refrigeration dryer

ECN air receiver with inspection opening 2" according to AD2000 directives.

### RSD-B 2.2 – 11.0 / RSDK-B 2.2 – 11.0

| Model           | Free air delivery<br>m <sup>3</sup> /min / cfm |        |        |        | Motor power |      | Compressed air outlet<br>inch | Noise level<br>dB(A) <sup>(1)</sup> | Air receiver<br>liter | Dimensions<br>L x W x H<br>mm | Weight<br>kg |
|-----------------|--|--------|--------|--------|-------------|------|-------------------------------|-------------------------------------|-----------------------|-------------------------------|--------------|
|                 | 7.5 bar  | 10 bar | 10 bar | 10 bar | kW          | HP   |                               |                                     |                       |                               |              |
| RSD-B ECN 2.2   | 0.34   | 12     | 0.27   | 10     | 2.2         | 3.0  | G½                            | 66                                  | 270                   | 1480 x 570 x 1140             | 218          |
| RSD-B ECN 3.0   | 0.46   | 16     | 0.38   | 13     | 3.0         | 4.0  | G½                            | 70                                  | 270                   | 1480 x 570 x 1140             | 227          |
| RSD-B ECN 4.0   | 0.64   | 23     | 0.53   | 19     | 4.0         | 5.5  | G½                            | 70                                  | 270                   | 1480 x 570 x 1140             | 227          |
| RSD-B ECN 5.5   | 0.83   | 30     | 0.74   | 26     | 5.5         | 7.5  | G½                            | 75                                  | 270                   | 1480 x 570 x 1140             | 253          |
| RSD-B ECN 7.5   | 1.13   | 40     | 1.02   | 36     | 7.5         | 10.0 | G½                            | 78                                  | 270                   | 1480 x 570 x 1212             | 283          |
| RSD-B ECN 11.0  | 1.57   | 55     | 1.54   | 54     | 11.0        | 15.0 | G½                            | 81                                  | 270                   | 1480 x 570 x 1212             | 304          |
| RSDK-B ECN 2.2  | 0.34   | 12     | 0.27   | 10     | 2.2         | 3.0  | G½                            | 66                                  | 270                   | 1480 x 570 x 1320             | 254          |
| RSDK-B ECN 3.0  | 0.46   | 16     | 0.38   | 13     | 3.0         | 4.0  | G½                            | 70                                  | 270                   | 1480 x 570 x 1320             | 263          |
| RSDK-B ECN 4.0  | 0.64   | 23     | 0.53   | 19     | 4.0         | 5.5  | G½                            | 70                                  | 270                   | 1480 x 570 x 1320             | 263          |
| RSDK-B ECN 5.5  | 0.83   | 30     | 0.74   | 26     | 5.5         | 7.5  | G½                            | 75                                  | 270                   | 1480 x 570 x 1320             | 289          |
| RSDK-B ECN 7.5  | 1.13   | 40     | 1.02   | 36     | 7.5         | 10.0 | G½                            | 78                                  | 270                   | 1480 x 570 x 1336             | 319          |
| RSDK-B ECN 11.0 | 1.57   | 55     | 1.54   | 54     | 11.0        | 15.0 | G½                            | 81                                  | 270                   | 1480 x 570 x 1336             | 337          |

<sup>(1)</sup> according to DIN EN ISO 2151:2009

| Options:  | Part no. |
|---|----------|
| Star-delta-starter for all 3.0 kW and 4.0 kW compressors (from 5.5 kW inclusive)                        | 10866    |
| Rotation direction control via phase rotation control   | 10867    |
| 500-ltr-ECN-air receiver  | 01714    |
| Electronic control RENNERtronic   | 10869    |
| Electronic control RENNERtronic Plus  | 00829    |
| Level actuated drain for refrigeration dryer  | 05311    |
| Kit for air receiver with level-controlled condensate drain   | 03162    |
| Metal bumper set for 250/270/500 ltr air receiver (consisting of 4 pieces, each Ø 75 mm / height 40 mm) | 15221    |
| Auxiliary pre-filter frame with filter mat for 2.2 – 5.5 kW   | 16269    |
| Auxiliary pre-filter frame with filter mat for 7.5 – 11.0 kW  | 16270    |



## RENNER Screw Compressors

RSD-B 2.2 – 11.0 ST on galvanized, vertical air receiver  
 RSDK-B 2.2 – 11.0 ST on galvanized, vertical air receiver  
 with attached refrigeration dryer

Air receiver according to AD2000 directives with handhole.

### RSD-B 2.2 – 11.0 ST / RSDK-B 2.2 – 11.0 ST

| Model          | Free air delivery<br>m <sup>3</sup> /min / cfm |        |      |    | Motor<br>power |      | Compressed<br>air outlet<br>inch | Noise<br>level<br>dB(A) <sup>(1)</sup> | Air<br>receiver<br>liter | Dimensions<br>L x W x H<br>mm | Weight<br>kg |
|----------------|--|--------|------|----|----------------|------|----------------------------------|--|--------------------------|-------------------------------|--------------|
|                | 7.5 bar  | 10 bar | 0.27 | 10 | kW             | HP   |                                  |  |                          |                               |              |
| RSD-B 2.2 ST   | 0.34   | 12     | 0.27 | 10 | 2.2            | 3.0  | G½                               | 66                                     | 270                      | 767 x 800 x 1690              | 221          |
| RSD-B 3.0 ST   | 0.46   | 16     | 0.38 | 13 | 3.0            | 4.0  | G½                               | 70                                     | 270                      | 767 x 800 x 1690              | 230          |
| RSD-B 4.0 ST   | 0.64   | 23     | 0.53 | 19 | 4.0            | 5.5  | G½                               | 70                                     | 270                      | 767 x 800 x 1690              | 230          |
| RSD-B 5.5 ST   | 0.83   | 30     | 0.74 | 26 | 5.5            | 7.5  | G½                               | 75                                     | 270                      | 767 x 800 x 1690              | 256          |
| RSD-B 7.5 ST   | 1.13   | 40     | 1.02 | 36 | 7.5            | 10.0 | G½                               | 78                                     | 270                      | 816 x 800 x 1747              | 286          |
| RSD-B 11.0 ST  | 1.57   | 55     | 1.54 | 54 | 11.0           | 15.0 | G½                               | 81                                     | 270                      | 816 x 800 x 1747              | 304          |
| RSDK-B 2.2 ST  | 0.34   | 12     | 0.27 | 10 | 2.2            | 3.0  | G½                               | 66                                     | 270                      | 950 x 800 x 1695              | 256          |
| RSDK-B 3.0 ST  | 0.46   | 16     | 0.38 | 13 | 3.0            | 4.0  | G½                               | 70                                     | 270                      | 950 x 800 x 1695              | 266          |
| RSDK-B 4.0 ST  | 0.64   | 23     | 0.53 | 19 | 4.0            | 5.5  | G½                               | 70                                     | 270                      | 950 x 800 x 1695              | 266          |
| RSDK-B 5.5 ST  | 0.83   | 30     | 0.74 | 26 | 5.5            | 7.5  | G½                               | 75                                     | 270                      | 950 x 800 x 1695              | 293          |
| RSDK-B 7.5 ST  | 1.13   | 40     | 1.02 | 36 | 7.5            | 10.0 | G½                               | 78                                     | 270                      | 986 x 800 x 1752              | 325          |
| RSDK-B 11.0 ST | 1.57   | 55     | 1.54 | 54 | 11.0           | 15.0 | G½                               | 81                                     | 270                      | 986 x 800 x 1752              | 356          |

<sup>(1)</sup>according to DIN EN ISO 2151:2009

| Options:   | Part no. |
|--|----------|
| Star-delta-starter for all 3.0 kW and 4.0 kW compressors (from 5.5 kW inclusive)                         | 10866    |
| Rotation direction control via phase rotation control  | 10867    |
| Electronic control RENNERtronic  | 10869    |
| Electronic control RENNERtronic Plus   | 00829    |
| Level actuated drain for refrigeration dryer for RSDK-B ST   | 05311    |
| Kit for air receiver with level-controlled condensate drain  | 05171    |
| Metal bumper set for 270 ltr air receiver vertical (consisting of 3 pieces, each Ø 80 mm / height 20 mm) | 05170    |
| Auxiliary pre-filter frame with filter mat for 2.2 – 5.5 kW  | 16269    |
| Auxiliary pre-filter frame with filter mat for 7.5 – 11.0 kW   | 16270    |

## RENNER – THE SPECIALIST IN COMPRESSORS




Founded in 1994, this family run company employs a highly motivated and successful team specialising in the development and production of economic compressor systems. The structure and size of the company guarantees flexible decision-making and quick realisation, thus ensuring that new developments meet the needs of the market.

### THE RENNER MANUFACTURING AND SUPPLY PROGRAMME:

We can supply you with the right compressor for any application – guaranteed.

#### SCREW COMPRESSORS:

- from 2.2 – 355.0 kW, also for oil-free compressed air of breathable quality
- water-injected screw compressors from 18.5 – 120.0 kW 
- up to 40 bar, e.g. for manufacture of PET bottles
- as compact units with compressed air tank, refrigerant drier and frequency control
- special version with plate heat exchanger – save energy and money!
- customised models, mobile/portable, built-in units, designed to customer specifications
- for special applications: gas compression, operation of drilling apparatus, rail and special-purpose vehicles

#### SCROLL COMPRESSORS:

- for oil-free compressed air from 1.5 – 30.0 kW



#### PISTON COMPRESSORS:

- from 1.5 – 11.0 kW
- stationary or mobile, with or without sound insulation

#### COMPRESSED AIR ACCESSORIES:

- compressed air filters, air receivers, refrigeration dryers, adsorption dryers, condensate drains and oil/water separation systems

Supplied by your RENNER distributor:

### RENNER GmbH · Kompressoren

Emil-Weber-Straße 32  
D-74363 Güglingen

Telefon +49 (0) 7135 93193-0  
Fax +49 (0) 7135 93193-50

E-Mail: [info@renner-kompressoren.de](mailto:info@renner-kompressoren.de)  
[www.renner-kompressoren.de](http://www.renner-kompressoren.de)



Reg.-Nr.: Q1 0205013

